# Technical Data **ONE TO ONE**


## DEKO

#### Typology: conference

One to One was designed as a chair for public seating, manufactured on an industrial scale, but endowed with a high degree of customisation, which is expressed in the wide range of configurations and finishes, in the just-in-time availability of spares, in the speedy delivery timing and in the ease of fitting out. Iseat width and backrest height can be custom buil: One to One, to fully satisfy every single client.



#### Dimensions

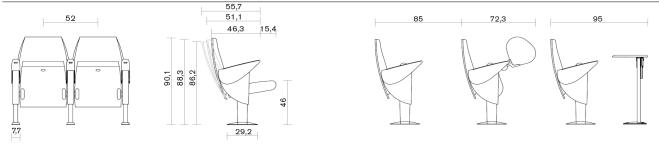

#### Available finishes

Upholstery: Fabric, Ecoleather, Leather

#### **Technical characteristics**

#### Seat and back:

SEAT: main structure in 12 mm cross laminated beechwood with steel pivots for seat rotation and fixing to the sides, veneered in clear varnished beechwood or in plastic laminate in gunmetal grey finish. Internal seat in laminated beechwood 7 mm thick.

BACK: main structure in curved laminated beechwood 12 mm thick, veneered clear varnished beechwood or in plastic laminate in gunmetal grey.

Inside back in laminated beech wood 7 mm thick.

#### Padding:

In fire retardant polyurethane foam with density 40 Kg/m<sup>3</sup> for the seat and 30 Kg/m<sup>3</sup> for the backrest. The polyurethane foam padding will have an exterior cover protecting the foam from fire and preventing the release of toxic gas.

#### Sides:

In steel sheet 2 mm thick, epoxy powder coated in gunmetal grey finish.

Foot for floor mounting in stamped steel sheet, epoxy coated in gunmetal grey finish.

#### Arms:

Standard arm in polypropylene in gunmetal grey finish with upper arm in upholstered or veneered in clear varnished beechwood.

On demand it is possible to have the version with all the arm in clear varnished beechwood.



### Technical Data ONE TO ONE





#### Mechanism

The seat tip up mechanism is a counterweight type. The mechanism is extremely noiseless and damped by a special rubber insert.

#### Width and special height

One to One has been designed to guarantee the customization of the product with a range of width included between 520 mm (standard) to 600 mm, and overall height from 900 up to 940 mm.

#### Accessories

Antipanic writing tablet in 2 dimensions; Arm in clear varnished beechwood; End and intermediate row support with panel boxes, short or long, upholstered or in beechwood; Cable management; Aisle light and row light; Row number and seat number; Possibility of installation on curved row or sloped floor.



#### Certifications

The chair has passed all the tests and provides wide guarantees on the quality of the used materials.